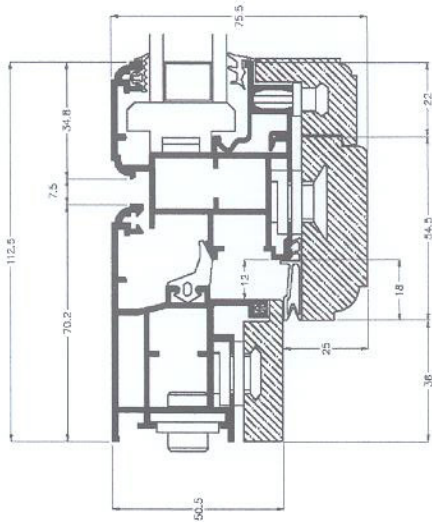


SW50 Series Data sheet

The SW50 open-joint product is characterised by an aluminium snap-lock glazing bead that guarantees the insulation of the internal wood from external pressure: this makes the installation and the maintenance of the windows easier. Thanks to its extreme versatility, it can be used in several applications for various types of window.



Technical characteristics:

System to open-joint

Glass application: with an aluminium snap-lock glazing bead covered by a wooden snap-lock frame.

Aluminium alloy: 6060 (UNI 3569).

Wood types: oak, ash, cherry, maple

Frame thickness 50.5 mm

Wing thickness 75.5 mm

Thermal performance*:

one-wing window:

Uw 2,0 W/m²K

two-wings window:

Uw 2,4 W/m²K

Test:

Air (UNI EN 1026)

4

Water (UNI EN 1027)

9A











Wind (UNI EN 12211)

C5

Thermal (UNI EN 1077-2)

Uf 3,89 W/m²K

TYPES ACHIEVABLE

				
Window 1 or more wings	French window 1 or more wings	Fixed glazing panelling	Parallel sliding windows	Wasistas
				
Folding windows	Entrance doors	Pivot-hung windows	Externally-opening windows	Swinging doors

* Calculation done according to UNI EN ISO 10077 -1 on a window 1230 X 1480 with a glass Ug=1,0