


SW180s Series Data sheet

The SW180s lift & slide window with load of up to 250 Kg per window, is the ideal solution for those who wish to enhance the style of their own home at best. The simplicity of use and the reliability of the system allow it to be used for very large glass-panelled surfaces.

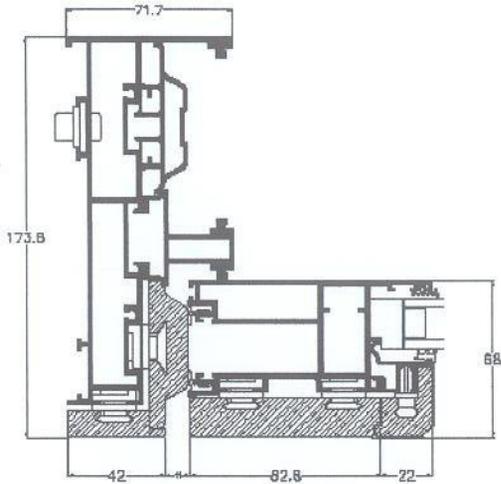

Technical characteristics:

Glass application: slide-in system for aluminium wing

Aluminium alloy: 6060 (UNI 3569).

Wood types: oak, ash, cherry, maple

Frame thickness 173.6 mm

Wing thickness 68 mm


Thermal performance*:

slide two wings $U_w 2,0 \text{ W/m}^2\text{K}$


Test:

Thermal (UNI EN 1077-2) $U_f 4,26 \text{ W/m}^2\text{K}$


TYPES ACHIEVABLE

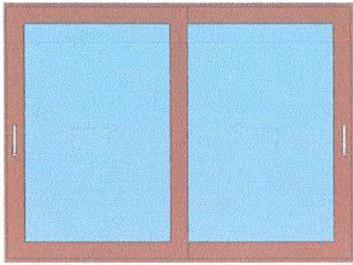


Lift & slide 2 wings

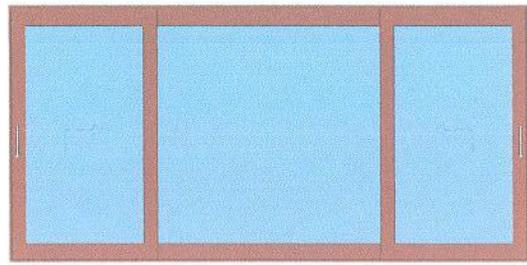

Lift & slide 3 wings

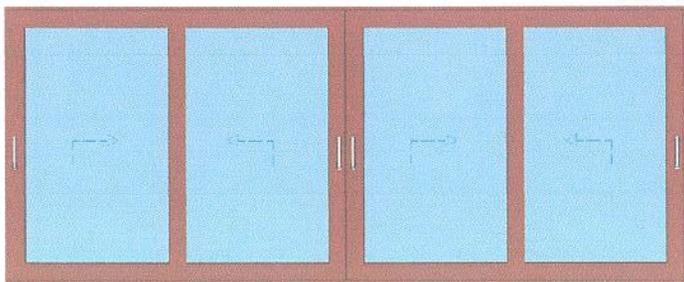

Lift & slide 4 wings

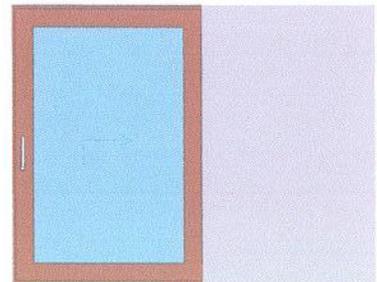

Lift & slide 1 or 2 retractable wings

* Calculation done according to UNI EN ISO 10077 -1 on a window 1230 X 1480 with a glass $U_g=1,0$